




INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 9 April 2003

Patents Form 1/77

Patents Act 1977  
(Rule 16)

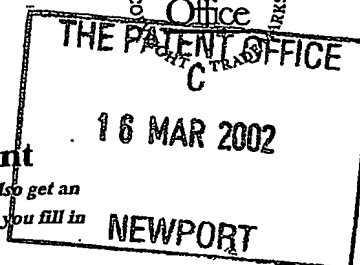

18MAR02 ET04221-2 C03077  
P01/7700 0.00-0206260.2

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

16 MAR 2002

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

JMH/7710

2. Patent application number

(The Patent Office will fill in this part)

0206260.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)

University of Bristol  
Senate House  
Tyndall Avenue  
Bristol BS8 1TH  
United Kingdom

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

798181001

4. Title of the invention

"Thermometer"

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Stevens Hewlett & Perkins  
1 St. Augustine's Place  
Bristol BS1 4UD  
United Kingdom

1545002

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

9

Claim(s)

3

Abstract

1

Drawing(s)

2 x 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

-

Translations of priority documents

-

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

-

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

1

Any other documents (please specify)

-

11.

I/We request the grant of a patent on the basis of this application.

Signature

*Joanne M Heaton*

Date

15/03/02

STEVENS HEWLETT & PERKINS

12. Name and daytime telephone number of person to contact in the United Kingdom

Joanne M Heaton

0117 922 6007

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

## THERMOMETER

This invention relates to a thermometer. More particularly, the present invention relates to an indwelling thermometer for clinical use.

Thermometers are well known in the art for providing an indication of temperature. Generally, thermometers comprise a heat-expandable fluid which is constrained to flow in a tube with indicia printed on the tube along the direction of expansion of the fluid; in use, the temperature is determined by reading the indication adjacent the leading edge of the fluid in the tube.

Recently, digital thermometers have been developed where a temperature is determined electronically and a digital indication of the temperature is provided.

More recently, disposable thermometers have been produced where the temperature indication is given using thermochromatic inks for predetermined reference intervals, an approximate temperature being provided by noting which inks have changed colour and which temperature they correlate to.

The present invention concerns an indwelling thermometer. In the description which follows the term "indwelling" is intended to define a thermometer which is left in a predetermined place for a long period of time to indicate that a rise in temperature above a predetermined threshold has occurred.

The invention will be described with particular reference to its preferred application in monitoring the temperature of the mammalian body, however, the invention finds equal utility in other areas where it is desirable to indicate that an unacceptable rise in temperature has occurred, for example in storage areas where spoilage may occur if a given temperature is exceeded.

In mammals a rise in temperature, especially in core body temperature, may be taken to be an indication of the presence of a pathology or of an infection. An early indication of infection can be vitally important to a farmer where the infection might spread through a herd of animals and early detection may prevent the spread of infection or unnecessary slaughter of uninfected animals.

In female mammals a temperature rise may also be indicative of ovulation or that oestrus is about to occur in mammals where actual release of the ovum is triggered by penetration. Both of these events are of interest to a farmer, a veterinary or medical practitioner and a woman experiencing difficulties in trying to conceive.

It is therefore an object of the present invention to provide a device which provides a signal that a rise in temperature above a predetermined threshold has occurred.

Accordingly, the present invention provides an indwelling thermometer comprising temperature sensing means and signal means for providing a continued indication that a predetermined threshold temperature has been exceeded.

Advantageously, the provision of a continued signal that the predetermined temperature has been exceeded enables the viewer to establish that the temperature has in fact been exceeded without continual monitoring of the subject.

It is a further object of the invention to provide means for establishing that predetermined threshold temperature. Advantageously, this allows for temperature profiles of an individual subject to be established and used to eliminate minor temperature variations due to external temperature, exercise or sleep.

The signal means may provide a visual, aural, or mechanical indication that the temperature has been exceeded. For example, the signal may be the movement of an indicator device, the illumination/quenching of a light, the release of a marker dye, colour change of a thermochromatic ink, vibration of the thermometer, generation of a radio signal, activation of a buzzer or alarm, or an analogue or a digital telemetry system signal.

The temperature sensing means may be electronic, chemical or mechanical. For example the temperature sensing means may be a thermochromatic dye, a wax or grease with a specific melting point, a thermodeformable plastics material, a thermocouple linkage, a thermistor or a printed circuit board.

The thermometer preferably dwells in a body cavity of the subject mammal, for example, the ear cavity or the vagina. Temperatures that are measured in the ear cavity tend to be very accurate since the ear cavity is so close to the brain. However, the thermometer may also be wholly or partially implanted into a subject mammal, for example, it may be implanted beneath the skin.

It is intended that in it's most simple form the thermometer of the invention gives an indication that the threshold has been exceeded, however, in an alternative embodiment, the invention also provides means for recording the temperature of the subject over a predetermined period of time.

Preferably, the thermometer comprises a biocompatible material. By the term "biocompatible material" as used herein is intended a material which is suitable for leaving *in situ* in a subject animal for a long period of time without causing irritation, tissue growth, infection or promoting infection or an immunological, including autoimmunological, reaction. The thermometer of the invention may be made of or coated with such a material. Examples of such materials include surgical grade polymers, such as:

ABS - acrylonitrile-butadiene-styrene terpolymer

COPE - copolyester elastomer

EAA - ethylene acrylic acid

EMA - ethylene methylacrylate

EVA - ethylene-vinyl-acetate

HDPE - high-density polyethylene

HIPS - high-impact polystyrene

LCP - liquid crystal polymer

LDPE - low-density polyethylene

LLDPE - linear low-density polyethylene

PBT - poly(butylene terephthalate)

PC - polycarbonate

PC/ABS - polycarbonate - ABS alloy/blend

PC/PET - polycarbonate-PET alloy/blend

PE - polyethylene  
 PEI - polyetherimide  
 PET - poly(ethylene terephthalate)  
 PP - polypropylene  
 PPO - poly(phenylene oxide)  
 PUR - polyurethane  
 PVC - polyvinyl chloride  
 SAN - styrene acrylonitrile  
 SBC - styrene block copolymer  
 SPS - syndiotactic polystyrene  
 TPE - thermoplastic elastomer  
 TPO - thermoplastic olefin  
 TPU - thermoplastic urethane  
 ULDPE - ultra low-density polyethylene  
 VLDPE - very low-density polyethylene  
 Silicone  
 Biodegradable Copolymers  
 Copolymer Coatings  
 Pseudo - Poly(Amino-Acids)  
 Ceramic Composites  
 Thermoplastic-Fiber Composites  
 PYROLYTIC CARBON    Pyrolite

In a first embodiment, the invention simply provides an indication that the predetermined threshold temperature has been exceeded. The thermometer is preferably in the form of an enclosed hollow container comprising two chambers separated by a waisted portion of the container. The container is preferably formed from a biocompatible material. The waisted portion of the container preferably contains the temperature sensing means while one of the chambers contains the signal means.

In this embodiment the temperature sensing means is a wax or grease, the melting point of which is at or close to the predetermined threshold temperature, and the signal means is preferably a marker dye contained in

one chamber of the container only. Preferably, the wax or grease forms a plug in the waisted portion of the container such that the movement of the marker dye between the chambers of the container is prevented.

In use, the thermometer is applied to the animal in a manner such that the chamber containing the marker dye is held internally in the animal while the other chamber is external of the animal and is visible, when the predetermined threshold temperature is exceeded, the wax or grease melts and allows travel of the marker dye to the visible chamber.

Preferably, the container is shaped such that the melted wax or grease, when cooled, cannot re-plug the waisted portion of the container, for example the regions adjacent the waisted portion may flare outwardly. Alternatively, the thermometer may be introduced to the subject mammal in a manner such that the chamber holding the marker dye is above the plug and the second, empty chamber hence, when the plug melts, the melted wax or grease will drain into the lower second chamber with the marker dye thereby preventing the waisted portion from becoming resealed.

The overall shape of the container is not critical although it is preferred that the thermometer does not cause discomfort to the subject mammal and in this respect it is preferred that the container is rounded or elliptical or other shape which does not present undue trauma to the animal. Ideally, the thermometer is shaped such that it is not likely to be easily lost if it is inserted into a body cavity such as the ear or the vagina. Additionally, where appropriate, it is desirable that the chambers are of unequal size to ensure that sufficient marker dye for detection is transferred from one chamber to the other.

The waisted portion of the thermometer may be a slight waisting of the container or, for more rapid melting of the wax or grease which may be held therein, be a narrow waisting or venturi. Ideally, the waisted portion is a tube of narrow cross-section with respect to the chambers, especially in the above-described embodiment where the temperature sensing means is a wax or grease which melts to allow transfer of a marker dye from one chamber to the other.



In order to establish the predetermined reference temperature the invention also provides a kit of thermometers, each thermometer detecting a different specific temperature, whereby in use a user applies a different thermometer to a subject animal each day to establish the range of normal temperature variation throughout a day for that subject animal. When used in this way, the kit provides an indication of the normal temperature range for that animal and allows selection of a thermometer indicating a temperature above the maximum daily variation for the detection of infection or of ovulation.

Alternatively, the predetermined reference temperature can be determined using an electronic temperature recording device which is introduced to and left to dwell in the subject mammal for a period of time, for example one week or one month, to record the temperature of the individual at selected intervals over that period of time, for example every 20 minutes for one week. An example of a device suitable for this purpose is the device sold under the trade name "Tiny Talk"<sup>TM</sup> from RS Components Ltd., modified to be smaller and to have sufficient battery power to record the temperature variations for the required length of time.

In a second embodiment, the thermometer of the present invention is an electronic device in which the temperature sensing means comprise a thermistor and the signal means provide an optical or audible signal.

Preferably, the temperature sensing means comprise a thermistor set to or close to the predetermined threshold temperature. Alternatively, a bimetallic strip or a printed circuit board may be used to sense the temperature.

Preferably, the signal means provide a light output, for example the illumination or extinguishing of an LED or other light source, or a sound output such as the activation of a buzzer, beep or other alarm sound. The activation of the signal is preferably irreversible ensuring that the increased temperature is detected. Alternatively, the signal means may be a radio transmitter which sends a signal to a remote receiving station, the alarm signal being generated at the receiving station. The signal means may also send a mobile

telecommunications signal to a mobile telephone, for example in the form of a "text" or SMS message or as a pre-recorded voice message. This allows for remote telemetry monitoring of, for example, a herd of cows or sheep.

In a third embodiment, the thermometer may be formed from a plastics material with a thermochromatic pigment or ink incorporated therein. In this embodiment the temperature sensing means and the signal means may both be the thermochromatic pigment or ink, or the temperature sensing means may be the thermochromatic pigment or ink, and the signal means may be fixative to prevent the thermochromatic pigment or ink reverting to its original colour.

The predetermined reference temperature is likely to be in the region of 35 - 44°C, preferably approximately 39°C, since mammalian core temperature is generally in the region of 37 - 38°C. Examples of normal core body temperatures are as follows:-

Animal	°C
Dog	38.9
Cat	38.6
Stallion	37.6
Mare	37.8
Rabbit	39.5
Pig	39.2
Goat	39.1
Sheep	39.1
Dairy cow	38.6
Human	37.3

Hence, the pre-determined reference temperature which is considered to be indicative of infection or of oestrus will be modified according to which mammal the thermometer will be used with.

Additionally, the size and shape of the thermometer can be adapted according to the subject mammal it is to be used in.

Where a visual signal is generated, it is preferable that the externally oriented portion of the thermometer be sufficiently large to be readily seen. For example, in farm animals the thermometer is likely to be read by a farmer when inspecting the cows, such as at milking time. In sheep, the externally oriented portion of the device may be sized so that it can be detected from a distance when herding the sheep. When to be used in the human female it is preferable that the device be shaped and sized similar to a tampon for comfort and ease of use for the user.

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawing of which,

Figures 1a and 1b show a first embodiment of the thermometer of the invention, and

Figure 2 is a schematic representation of an electronic version of the thermometer of the present invention.

Referring to Figure 1a a thermometer 10 is provided which is in the form of a container having two chambers 12 and 14 separated by a waisted portion 16. The waisted portion 16 is in the form of a narrow tube and contains a plug 18 of a wax having a melting temperature of 40°C for use in dairy cows. Chamber 12 contains a marker dye and is much larger than chamber 14 to ensure transfer of the marker dye to chamber 14 on removal, by melting, of the plug 18. The thermometer 10 is made from a medical grade plastics material.

Figure 1b shows the thermometer 10 of Figure 1a after the wax plug 18 has melted due to the increase in body temperature above the predetermined threshold temperature of 40°C.

Referring to Figure 2 an electronic version 20 of the device is shown. The device 20 comprises a sensor 22, coated with a biocompatible or non-irritant

material, linked to an indicator 24, in the form of an LED, by a conductor 26 also coated with a biocompatible or non-irritant material. In use, the device is inserted into the vagina of a cow and left in place. When sensor 22 detects a rise in temperature above a predetermined threshold it sends a signal along connector 26 to indicator 24, which illuminates. On visual inspection, the farmer, or a vet, then knows that the temperature of that particular cow has exceeded the threshold temperature and can investigate pyrexia or oestrus in that animal.

### CLAIMS

1. An indwelling thermometer comprising temperature sensing means and signal means for providing a continued indication that a predetermined threshold temperature has been exceeded.
2. An indwelling thermometer according to claim 1, in which signal means provides a visual, aural, or mechanical indication that the temperature has been exceeded.
3. An indwelling thermometer according to claim 1 or claim 2, in which the signal is selected from the group comprising the movement of an indicator device, the illumination/quenching of a light, the release of a marker dye, colour change of a thermochromatic ink, vibration of the thermometer, generation of a radio signal, activation of a buzzer or alarm, and a digital telemetry system signal.
4. An indwelling thermometer according to any one of claims 1 to 3, in which temperature sensing means is electronic, chemical or mechanical.
5. An indwelling thermometer according to any one of claims 1 to 4, in which the temperature sensing means comprises a thermochromatic dye, a wax or grease with a specific melting point, a thermodeformable plastics material, a thermocouple linkage, a thermistor or a printed circuit board.
6. An indwelling thermometer according to any one of claims 1 to 5, in which the thermometer indwells in a body cavity of the subject mammal.

7. An indwelling thermometer according to any one of claims 1 to 6, in which the thermometer indwells in the ear cavity or the vagina or is implanted beneath the skin.
8. An indwelling thermometer according to any preceding claim, in which the thermometer comprises an enclosed hollow container comprising two chambers separated by a waisted portion of the container.
9. An indwelling thermometer according to any preceding claim, in which the waisted portion of the container contains the temperature sensing means.
10. An indwelling thermometer according to claim 9, in which the temperature sensing means is a wax or grease, the melting point of which is at or close to the predetermined threshold temperature.
11. An indwelling thermometer according to any one of claims 1 to 8, in which the signal means is a marker dye contained in one chamber of the container only.
12. A kit of thermometers to establish the predetermined threshold temperature of an individual subject mammal, the kit comprising a series of thermometers according to any preceding claim for detecting a different predetermined threshold temperature across a range of temperatures.
13. A kit according to claim 12 in which the temperature range is from 35 - 45°C.
14. An indwelling thermometer according to any one of claims 1 to 7, in which the thermometer is formed from a plastics material with a thermochromatic pigment or ink incorporated therein.

15. An indwelling thermometer according to claim 14, in which temperature sensing means comprises the thermochromatic pigment or ink and the signal means comprises a fixative to prevent the thermochromatic pigment or ink reverting to its original colour.
16. A thermometer, substantially as hereinbefore described with reference to and as illustrated by Figures 1 and 2 of the accompanying drawings.

**ABSTRACT**  
**THERMOMETER**

A thermometer is described which is suitable as an indwelling thermometer to detect pyrexia or oestrus in a mammal. The thermometer provides a continued signal that a predetermined reference temperature has been exceeded, which temperature is selected to be indicative of pyrexia or oestrus in a given species and may change according to species.



Figure 1a


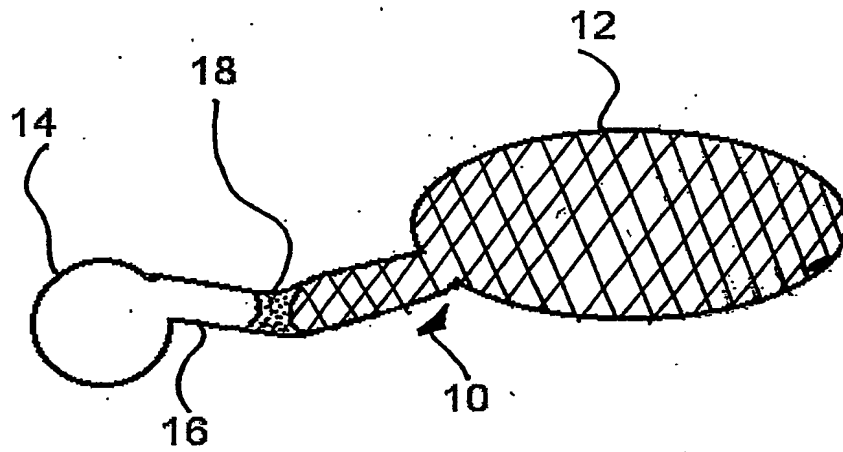


Figure 1b



2/2

**Figure 2**

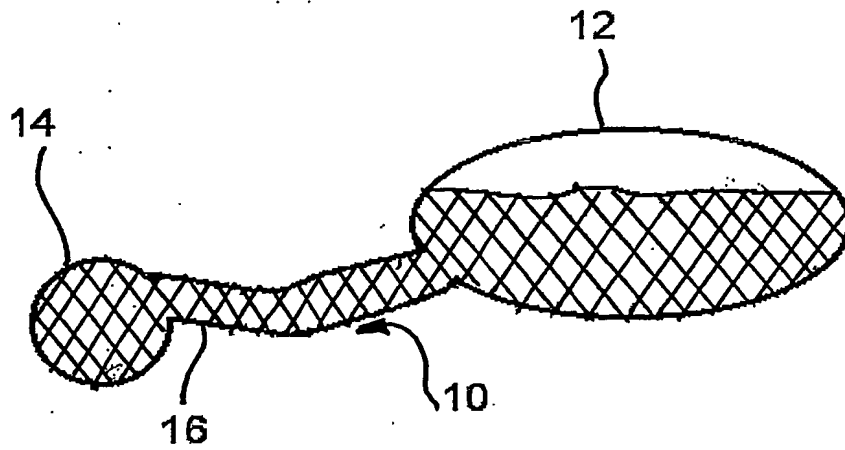